

Z.P.H.U. WA-BIS

Lany 66
28-330 Wodzislaw
Poland

Tel: 00 48 41 381 01 04 Fax: 00 48 41 381 01 05

e-mail: sales@wa-bis.com.pl

website: www.wa-bis.pl/en



Agrément Certificate

15/5270

Product Sheet 3

CLIMATEQ BREATHABLE MEMBRANES

FOR USE IN TIMBER FRAME CONSTRUCTIONS

This Agrément Certificate Product Sheet⁽¹⁾ relates to Climateq Breathable Membranes, flexible three-layer polypropylene breather membranes for use in timber-frame walls with a cavity and a masonry outer leaf, weatherboarding or tile/slate cladding.

(1) Hereinafter referred to as 'Certificate'.

CERTIFICATION INCLUDES:

- factors relating to compliance with Building Regulations where applicable
- factors relating to additional non-regulatory information where applicable
- independently verified technical specification
- assessment criteria and technical investigations
- design considerations
- installation guidance
- regular surveillance of production
- formal three-yearly review.



KEY FACTORS ASSESSED

Weathertightness — the products will contribute to protecting a wall against water penetration (see section 6).

Risk of condensation — the products have low resistance to water vapour and can contribute to reducing the risk of interstitial condensation (see section 7).

Strength — the products have adequate strength to resist damage during the construction of the walls (see section 8).

Properties in relation to fire — the products are classified as Class E in accordance with BS EN 13501-1 : 2018 and their use is restricted in some cases by the national Building Regulations (see section 9).

Durability — the products will have a life equal to that of the building in which they are installed (see section 11).



The BBA has awarded this Certificate to the company named above for the products described herein. These products have been assessed by the BBA as being fit for their intended use provided they are installed, used and maintained as set out in this Certificate.

On behalf of the British Board of Agrément

Date of Third issue: 5 July 2019

John Albon
Chief Scientific Officer

Originally certificated on 3 November 2015

Claire Curtis-Thomas
Chief Executive

The BBA is a UKAS accredited certification body – Number 113.

*The schedule of the current scope of accreditation for product certification is available in pdf format via the UKAS link on the BBA website at www.bbacerts.co.uk
Readers are advised to check the validity and latest issue number of this Agrément Certificate by either referring to the BBA website or contacting the BBA direct.*

Any photographs are for illustrative purposes only, do not constitute advice and should not be relied upon.

British Board of Agrément

Bucknalls Lane
Watford
Herts WD25 9BA

©2019

tel: 01923 665300
clientservices@bbacerts.co.uk
www.bbacerts.co.uk

Regulations

In the opinion of the BBA, Climateq Breathable Membranes for use in timber frame constructions, if installed, used and maintained in accordance with this Certificate, can satisfy or contribute to satisfying the relevant requirements of the following Building Regulations (the presence of a UK map indicates that the subject is related to the Building Regulations in the region or regions of the UK depicted):



The Building Regulations 2010 (England and Wales) (as amended)

Requirement:	B3(3)(4)	Internal fire spread (structure)
Comment:		The products can contribute to satisfying this Requirement. See section 9.1 of this Certificate.
Requirement:	B3(3)(4)	External fire spread
Comment:		The products are restricted by this Requirement. See section 9 of this Certificate.
Requirement:	C2(b)	Resistance to moisture
Comment:		The products will contribute to a wall satisfying this Requirement. See section 6.1 of this Certificate.
Requirement:	C2(c)	Resistance to moisture
Comment:		The products will contribute to a wall satisfying this Requirement. See section 7.1 of this Certificate.
Regulation:	7	Materials and workmanship (applicable to Wales only)
Regulation:	7(1)	Materials and workmanship (applicable to England only)
Comment:		The products are acceptable. See section 11 and the <i>Installation</i> part of this Certificate.



The Building (Scotland) Regulations 2004 (as amended)

Regulation:	8(1)	Durability, workmanship and fitness of materials
Comment:		The products can contribute to a wall satisfying this Regulation. See section 11 and the <i>Installation</i> part of this Certificate.
Regulation:	9	Building standards applicable to construction
Standard:	2.4	Cavities
Comment:		The products can enable a wall to satisfy this Standard with respect to clause 2.4.2 ⁽¹⁾⁽²⁾ . See section 9.1 of this Certificate.
Standard:	3.10	Precipitation
Comment:		The products will contribute to a wall satisfying clauses 3.10.1 ⁽¹⁾⁽²⁾ and 3.10.5 ⁽¹⁾⁽²⁾ of this Standard. See section 6.1 of this Certificate.
Standard:	3.15	Condensation
Comment:		The products can enable a wall to satisfy this Standard with regard to interstitial condensation. See section 7.1 of this Certificate.
Standard:	7.1(a)	Statement of sustainability
Comment:		The products can contribute to meeting the relevant requirements of Regulation 9, Standards 1 to 6 and therefore will contribute to a construction meeting a bronze level of sustainability as defined in this Standard.
Regulation:	12	Building standards applicable to conversions
Comment:		Comments in relation to the products under Regulation 9, Standards 1 to 6 also apply to this Regulation, with reference to clause 0.12.1 ⁽¹⁾⁽²⁾ and Schedule 6 ⁽¹⁾⁽²⁾ .

(1) Technical Handbook (Domestic).

(2) Technical Handbook (Non-Domestic).



The Building Regulations (Northern Ireland) 2012 (as amended)

Regulation:	23(a)(i)	Fitness of materials and workmanship
Comment:	(iii)(b)(i)	The products are acceptable. See section 11 and the <i>Installation</i> part of this Certificate.
Regulation:	28(b)	Resistance to moisture and weather
Comment:		The products will contribute to a wall satisfying this Regulation. See section 6.1 of this Certificate.
Regulation:	29	Condensation
Comment:		The products can enable a wall to satisfy this Regulation. See section 7.1 of this Certificate.
Regulation:	35(3)(4)	Internal fire spread (structure)
Comment:		The products can contribute to satisfying this Requirement. See section 9.1 of this Certificate.

Construction (Design and Management) Regulations 2015

Construction (Design and Management) Regulations (Northern Ireland) 2016

Information in this Certificate may assist the client, designer (including Principal Designer) and contractor (including Principal Contractor) to address their obligations under these Regulations.

See section: 1 *Description* (1.1) of this Certificate.

Additional Information

NHBC Standards 2019

In the opinion of the BBA, Climateq Breathable Membranes for use in timber frame constructions, if installed, used and maintained in accordance with this Certificate, can satisfy or contribute to satisfying the relevant requirements in relation to *NHBC Standards*, Chapter 6.2 *External timber framed walls*.

CE marking

The Certificate holder has taken the responsibility of CE marking the products in accordance with harmonised European Standard BS EN 13859-2 : 2014. An asterisk (*) appearing in this Certificate indicates that data shown are given in the manufacturer's Declaration of Performance.

Technical Specification

1 Description

1.1 Climateq Breathable Membranes for use in timber frame constructions are three-layer polypropylene composites. They are available in two ranges: POP and PRO, with the nominal characteristics given in Tables 1 and 2 respectively.

Table 1 Nominal characteristics of Climateq POP membranes

Characteristic (unit)	Climateq Breathable Membranes		
	Climateq POP 100	Climateq POP 120	Climateq POP 135
Thickness (mm)	0.40	0.50	0.54
Mass per unit area (g·m ⁻²)	100	120	135
Roll length (m) ⁽¹⁾	50	50	50
Roll width (m) ⁽¹⁾	1.0 and 1.5	1.0 and 1.5	1.0 and 1.5
Colour			
upper	various	various	various
lower	various	various	various
Tensile strength* (N per 50 mm)			
longitudinal	220	280	320
transverse	130	160	185
Elongation* (%)			
longitudinal	60	65	70
transverse	70	85	90
Tear resistance* (N)			
longitudinal	100	105	115
transverse	125	125	140
Resistance to penetration of air (m ³ /m ² ·h ⁻¹ ·50 Pa ⁻¹)	≤0.02	≤0.02	≤0.02
Watertightness*			
unaged	W1	W1	W1
aged ⁽²⁾	W1	W1	W1
Equivalent air layer thickness S _d (m)	0.020	0.020	0.020

(1) Other lengths and widths are available.

(2) Aged in accordance with BS EN 13859-1 : 2014, Annex C.

Table 2 Nominal characteristics of Climateq PRO membranes

Characteristic (unit)	Climateq Breathable Membranes			
	Climateq PRO 150	Climateq PRO 165	Climateq PRO Black 180	Climateq PRO Focus 210
Thickness (mm)	0.60	0.62	0.64	0.77
Mass per unit area (g·m ⁻²)	150	165	180	210
Roll length (m) ⁽¹⁾	50	50	50	50
Roll width (m) ⁽¹⁾	1.0 and 1.5	1.0 and 1.5	1.0 and 1.5	1.0 and 1.5
Colour				
upper	various	various	various	various
lower	various	various	various	various
Tensile strength* [N(50 mm) ⁻¹]				
longitudinal	340	390	460	490
transverse	210	220	250	290
Elongation* (%)				
longitudinal	60	70	75	60
transverse	70	80	90	70
Tear resistance* (N)				
longitudinal	140	146	170	230
transverse	190	190	215	280
Resistance to penetration of air (m ³ /m ² ·h ⁻¹ ·50 Pa ⁻¹)	≤0.02	≤0.02	≤0.02	≤0.02
Watertightness*				
unaged	W1	W1	W1	W1
aged ⁽²⁾	W1	W1	W1	W1
Equivalent air layer thickness S _d (m)	0.020	0.020	0.020	0.015

(1) Other lengths and widths are available.

(2) Aged in accordance with EN 13859-1 : 2014, Annex C.

1.2 The Certificate holder can provide details of a suitable single-sided REPER-O tape for taping repairs.

2 Manufacture

2.1 The membranes are manufactured by a thermal-bonding process in which a polypropylene breathable film is bonded with polypropylene non-woven membranes to form a flexible sheet.

2.2 As part of the assessment and ongoing surveillance of product quality, the BBA has:

- agreed with the manufacturer the quality control procedures and product testing to be undertaken
- assessed and agreed the quality control operated over batches of incoming materials
- monitored the production process and verified that it is in accordance with the documented process
- evaluated the process for management of nonconformities
- checked that equipment has been properly tested and calibrated
- undertaken to carry out the above measures on a regular basis through a surveillance process, to verify that the specifications and quality control operated by the manufacturer are being maintained.

2.3 The products are manufactured in Poland and marketed in the UK by WABIS Roofing Accessories Ltd, Mansfield i-Centre, Oakham Business Park, Hamilton Way, Mansfield, Nottinghamshire NG18 5BR, Tel: 07494 540742, e-mail: office@wabis.co.uk, website: www.wabis.co.uk

3 Delivery and site handling

3.1 Rolls are delivered to site individually wrapped in polythene foil with a label bearing the manufacturer's details, product name and size, installation instructions, CE details and the BBA logo incorporating the number of this Certificate.

3.2 The rolls should be stored flat or on end on a clean, level surface and kept under cover.

Assessment and Technical Investigations

The following is a summary of the assessment and technical investigations carried out on Climateq Breathable Membranes for use in timber frame constructions.

Design Considerations

4 Use

4.1 Climateq Breathable Membranes for use in timber frame constructions are satisfactory for use as on-site or factory-applied breather membranes in timber-frame walls with a cavity and a masonry outer leaf, weatherboarding or tile/slate cladding.

4.2 In the absence of other guidance, suitable timber-frame walls are defined as those designed and built in accordance with *NHBC Standards 2019*, Chapter 6.2.

4.3 The products meet the requirement for a Class W1* material in accordance with BS EN 13859-2 : 2014 and meet the NHBC requirement given in *NHBC Standards 2019*, Chapter 6.2, as high-performance breather membranes for use in very severe conditions⁽¹⁾.

(1) Very severe conditions are defined in the *NHBC Standards 2019*, see Figure 1 *Exposure zones*

5 Practicability of installation

The products are designed to be installed by competent general builders or contractors experienced with these types of products.

6 Weathertightness



6.1 The products are classified as Class W1* in accordance with BS EN 13859-2 : 2014. The products resist liquid water penetration and wind-blown snow, and will protect the sheathing and frame from external moisture.

6.2 The products can be used as temporary weather protection during construction and prior to the completion of external brickwork or cladding. The period of such use should, however, be kept to a minimum.

7 Risk of condensation



7.1 For design purposes, the products' water vapour resistance may be taken as less than or equal to $0.60 \text{ MN}\cdot\text{s}\cdot\text{g}^{-1}$, and they are classified as breather membranes in accordance with BS 5250 : 2011. Walls incorporating the products will, therefore, adequately limit the risk of interstitial condensation when designed and constructed in accordance with BS 5250 : 2011, Annex G.

7.2 The risk of condensation occurring within the wall of a timber-frame building will depend upon the properties and vapour resistance of other materials used in the construction, the internal and external conditions and the effectiveness of the internal vapour control layer.

8 Strength

8.1 The products will resist the normal loads associated with construction and installation of timber-frame constructions.

8.2 The products are not adversely affected by water and will retain their mechanical properties when wet.

9 Properties in relation to fire



9.1 The products are classified as Class E^{*(1)} in accordance with BS EN 13501-1 : 2018. Where the products form the face of a cavity the permissible areas of use and the spacing of cavity barriers are restricted by the national Building Regulations.

(1) Report reference 2/14, issued by Instytut Mechanizacji Budownictwa i Gornictwa Skalnego. Report is available from the Certificate holder upon request.



9.2 The products should not be used on buildings in England that have a storey at least 18 m above ground level and contain: one or more dwellings, an institution, a room for residential purposes (excluding any room in a hostel, hotel or boarding house), student accommodation, care homes, sheltered housing, hospitals or dormitories in boarding schools.

9.3 Cavity barriers should be used, to satisfy the requirements of the national Building Regulations.

10 Maintenance

As the products are confined to the wall space and have suitable durability (see section 11), maintenance is not required. However, any damage occurring before enclosure must be repaired (see section 15).

11 Durability



The products will be virtually unaffected by the normal conditions found in timber-frame walls and will have a life comparable with that of the building in which they are installed.

12 Reuse and recyclability

The products contain polypropylene, which can be recycled.

13 General

Climateq Breathable Membranes for use in timber frame constructions must be installed in accordance with the Certificate holder's instructions and the recommendations given in *NHBC Standards 2019*, Chapter 6.2, where appropriate.

14 Procedure

14.1 The products must be secured at regular intervals with stainless steel staples or nails, to prevent damage by wind action.

14.2 Upper layers should overlap layers to shed water away from the sheathing. Vertical laps should be staggered wherever possible (see Figure 1).


14.3 Laps should be at least:

- horizontal 100 mm
- vertical 150 mm.

14.4 It is essential that the positions of the studs are marked on the face of the breather membrane, usually by tape, to enable fixing of wall ties and battens.

14.5 It is essential that the lowest timbers in the wall are protected by the breather membrane.

Figure 1 Membrane installation

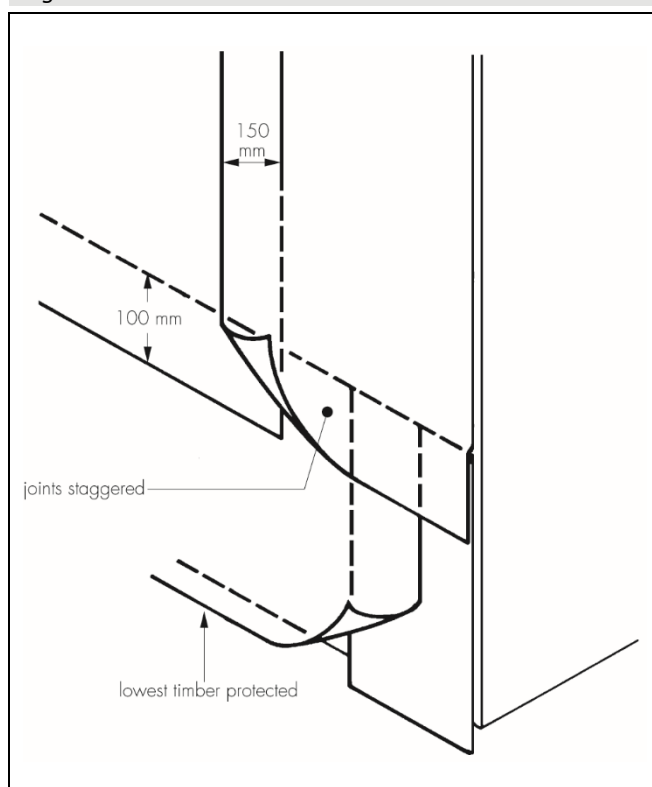

15 Repair

The products can be damaged by careless handling, high winds or vandalism. Damage to the membranes must be repaired prior to the installation of external walls or cladding by laying another sheet over the damaged area, by patching and sealing correctly using REPER-O tape, ensuring that water is shed away from the sheathing.

16 Tests

An assessment was made of data to BS EN 13859-2 : 2014 in relation to:

- dimensions
- mass per unit area
- tensile strength and elongation
- resistance to tear
- dimensional stability
- low temperature flexibility
- resistance to penetration of air
- resistance to water penetration
- resistance to artificial ageing
- water vapour transmission
- watertightness of seams.

17 Investigations

The manufacturing process was evaluated, including the methods adopted for quality control, and details were obtained of the quality and composition of the materials used.

Bibliography

BS 5250 : 2011 *Code of practice for control of condensation in buildings*

BS EN 13501-1 : 2018 *Fire classification of construction products and building elements — Classification using test data from reaction to fire tests*

BS EN 13859-2 : 2014 *Flexible sheets for waterproofing — Definitions and characteristics of underlays — Underlays for discontinuous roofing*

18 Conditions

18.1 This Certificate:

- relates only to the product/system that is named and described on the front page
- is issued only to the company, firm, organisation or person named on the front page – no other company, firm, organisation or person may hold or claim that this Certificate has been issued to them
- is valid only within the UK
- has to be read, considered and used as a whole document – it may be misleading and will be incomplete to be selective
- is copyright of the BBA
- is subject to English Law.

18.2 Publications, documents, specifications, legislation, regulations, standards and the like referenced in this Certificate are those that were current and/or deemed relevant by the BBA at the date of issue or reissue of this Certificate.

18.3 This Certificate will remain valid for an unlimited period provided that the product/system and its manufacture and/or fabrication, including all related and relevant parts and processes thereof:

- are maintained at or above the levels which have been assessed and found to be satisfactory by the BBA
- continue to be checked as and when deemed appropriate by the BBA under arrangements that it will determine
- are reviewed by the BBA as and when it considers appropriate.

18.4 The BBA has used due skill, care and diligence in preparing this Certificate, but no warranty is provided.

18.5 In issuing this Certificate the BBA is not responsible and is excluded from any liability to any company, firm, organisation or person, for any matters arising directly or indirectly from:

- the presence or absence of any patent, intellectual property or similar rights subsisting in the product/system or any other product/system
- the right of the Certificate holder to manufacture, supply, install, maintain or market the product/system
- actual installations of the product/system, including their nature, design, methods, performance, workmanship and maintenance
- any works and constructions in which the product/system is installed, including their nature, design, methods, performance, workmanship and maintenance
- any loss or damage, including personal injury, howsoever caused by the product/system, including its manufacture, supply, installation, use, maintenance and removal
- any claims by the manufacturer relating to CE marking.

18.6 Any information relating to the manufacture, supply, installation, use, maintenance and removal of this product/system which is contained or referred to in this Certificate is the minimum required to be met when the product/system is manufactured, supplied, installed, used, maintained and removed. It does not purport in any way to restate the requirements of the Health and Safety at Work etc. Act 1974, or of any other statutory, common law or other duty which may exist at the date of issue or reissue of this Certificate; nor is conformity with such information to be taken as satisfying the requirements of the 1974 Act or of any statutory, common law or other duty of care.